

Dati tecnici/Listino prezzi

Data sheet/Price list

La gamma Lord / The Lord range



LORD	CODICE CODE	Misure Sizes (mm)	Peso scatola Box weight (kg)	Misura Scatola Box size (cm)	Scatole max per bancale Max. boxes per pallet	Peso bancale Pallet weight (kg)	Dimensione bancale Pallet size (cm)	Pezzi per scatola Pieces per box	Pezzi/ Bancale Pcs/plt	€ /pz
LORD	L8000000	8	6,90	39x39x16	36	256	80x120x120	100	4200	1,45
PROLUNGA EXTENSION	L4000000	4	4,70	33x33x12	48	179	80x120x120	100	4800	0,75

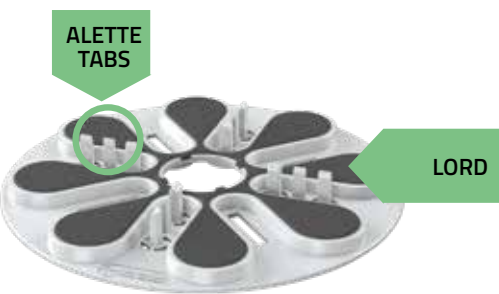
NOTE
_ *La testa Lord può essere ordinata, su richiesta, con le alette in un unico spessore, da 2 mm o da 3 mm.
_ Schede tecniche complete e scaricabili su lord.dpssolving.com
_ I prodotti non sono vendibili singolarmente ma solo a scatole intere.

NOTES
_ *On request, the Lord heads can be ordered with tabs in a single thickness of 2 mm or 3 mm
_ Full technical specifications are downloadable via lord.dpssolving.com
_ Products are not sold individually but only by the box.

PRODOTTO CONSIGLIATO: livellatore Lucky / RECOMMENDED PRODUCT: Lucky leveller



	CODICE CODE	Misure Sizes (mm)	Peso scatola Box weight (kg)	Misura Scatola Box size (cm)	Pezzi per scatola Pieces per box	€ /pz
LUCKY	KTLU1525	1,5 / 2,5	9,60	33x33x12	200	0,495

LORD	ALETTE / TABS	LEGENDA / LEGEND
 Ø 150 mm	 Sp. 2,3,4 mm* h. 12 mm	 ALETTE / TABS LORD PROLUNGA / EXTENSION
 Ø 150 mm		
LORD		PROLUNGA / EXTENSION
 H 8 mm		 H 4 mm

Consigli di posa di un sopraelevato su pacchetto isolante ed impermeabile: consigliamo l'uso di pannelli in EPS o XPS o altro isolante termico, con valori di resistenza allo schiacciamento "idonei alla resistenza da compressione esercitata da pavimentazione sopraelevata su supporti in PP". La mancata verifica dell'idoneità del pannello isolante, potrebbe causare lo schiacciamento del pannello sotto il peso del sopraelevato, causando antiestetici movimenti dell'intera pavimentazione; inoltre, l'eccessiva duttilità del pannello isolante, potrebbe compromettere le performance del manto impermeabile e/o dei supporti preposti al sopraelevamento delle pavimentazioni. In questa situazione consigliamo un confronto preliminare sia con i nostri tecnici sia con i produttori del pannello isolante; se dovessero sussistere dubbi in merito alla resistenza alla compressione del pannello, suggeriamo sempre l'utilizzo dei nostri separatori Skudo per la sola tutela dell'impermeabilizzazione (Pag. 92 - 95).

Recommendations for laying an elevated floor on an insulating and waterproof package: We recommend the use of EPS or XPS panels or other thermal insulation, with crushing resistance values "suitable for the compressive strength exerted by raised flooring on PP supports". Failure on verification of the suitability of the insulating panel could cause the panel to crush under the weight of the raised floor, causing unsightly movements of the entire flooring; furthermore, the excessive ductility of the insulating panel could compromise the performance of the waterproof covering and / or the stability of the supports of the raised floor. In this situation we recommend a preliminary consultation both with our technicians and with the insulation panel manufacturers; if there are any doubts about the compressive strength of the panel, we always suggest the use of our Skudo separators for the sole protection of waterproofing (Page 92 - 95).